

# 2-Post Floorplate



Shown with optional equipment.

## Optional Frame Cradle Pad



## Superior Carriage Construction

Take a close look at our lift carriages. You'll notice our 53" tall carriages are considerably taller than most which minimizes the stress placed on the load bearings and columns.



## Single-Point Lock Release



## Heavy-Duty Lift Columns



## Optional Steel Lifting Pads



## Optional Screw Pads



## Optional Frame Cradle Adapters



## Oversize Cable Sheaves



## 3" and 6" Stackable Adapters

## Features

- 9,000 pound lifting capacity
- Short column for low-ceiling installations
- Wide or narrow configuration
- Single-piece columns
- Single point safety release
- Chain lifting system combined with dual hydraulic cylinders
- Electric/hydraulic power system
- Large, 17" x 19" A36 steel base plate
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Features heavy-duty 3/8" aircraft cable
- Oversized sheave diameter reduces cable fatigue
- Eight piece truck and van adapter set standard
- Triple-telescoping/low-profile arms
- Versatile drop-in contact pads with stackable adapters

## TWO-POST MODELS / FLOORPLATE / CHAIN-OVER

MODEL	XPR-9F	XPR-9FX
Lifting Capacity*	9,000 lbs. / 4082 kg.	9,000 lbs. / 4082 kg.
*Max Capacity / Front Axle	4,500 lbs. / 2041 kg.	4,500 lbs. / 2041 kg.
*Max Capacity / Rear Axle	4,500 lbs. / 2041 kg.	4,500 lbs. / 2041 kg.
A - Height Overall:	128" / 3251 mm.	128" / 3251 mm.
B - Width Overall (Outside of Base Plate)	132" / 3353 mm.	145" / 3683 mm.
C - Width (Outside of Columns):	124" / 3150 mm.	137" / 3480 mm.
D - Cover Height:	2" / 51 mm.	2" / 51 mm.
E - Inside Columns:	102" / 2591 mm.	115" / 2921 mm.
F - Reach (Front Arm Min.):	25" / 635 mm.	28" / 711 mm.
G - Reach (Front Arm Max.):	46" / 1168 mm.	55" / 1397 mm.
H - Reach (Rear Arm Min.):	34" / 864 mm.	34" / 864 mm.
I - Reach (Rear Arm Max.):	55" / 1397 mm.	55" / 1397 mm.
J - Min. Pad Height:	4" / 102 mm.	4" / 102 mm.
K - Rise:	72" / 1829 mm.	72" / 1829 mm.
L - Max Lift Height (Pad Only):	76" / 1930 mm.	76" / 1930 mm.
M - Max Lift Height (6" Adapter):	82" / 2083 mm.	82" / 2083 mm.
N - Drive-Thru Clearance:	93" / 2362 mm.	106" / 2692 mm.
Motor (*)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.
Time of Full Rise:	45 Seconds	45 Seconds
Max Load Per Arm:	2,250lbs. / 1021 Kg.	2,250lbs. / 1021 Kg.


\* Special Voltages Available Upon Request.

The design, material and specifications are subject to change without notice.



BendPak Inc. is a member of the Automotive Lift Institute

## Dimensions

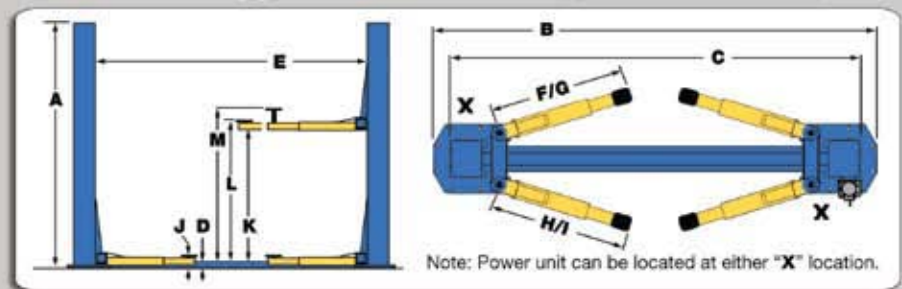

# 2-Post Floorplate



Optional Frame Cradle Pad



## Superior Carriage Construction

Take a close look at our lift carriages. You'll notice our 53" tall carriages are considerably taller than most which minimizes the stress placed on the load bearings and columns.



Single-Point Lock Release




Optional Screw Pads



Oversize Cable Sheaves



Direct-Drive Cylinders



Optional Frame Cradle Adapters



3" and 6" Stackable Adapters



Optional Steel Lifting Pads

## Features

- 9,000- to 12,000-pound lifting capacity
- Wide or narrow drive-thru configurations
- Single-piece columns
- Single point safety release
- Dual hydraulic "Direct-Drive" cylinders
- Electric/hydraulic power system
- Large, 19" x 20" A36 steel base plate on XPR-9's
- Large, 25" x 22" A36 steel base plate on XPR-12FD
- Self-lubricating dura-glide UHMW polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Heavy-duty dual 3/8" equalizer cables with oversize sheaves on XPR-9FD and XPR-9FDX
- Heavy-duty 1/2" equalizer cables with oversize 6" sheaves on XPR-12FD
- Eight piece truck and van adapter set standard
- Triple-telescoping/low-profile arms on XPR-9FD
- Triple-telescoping/low-profile arms on XPR-9FDX
- Triple-telescoping arms on XPR-12FD
- Versatile drop-in contact pads with stackable adapters

### TWO-POST MODELS / FLOORPLATE / DIRECT-DRIVE

MODEL	XPR-9FD	XPR-9FDX	XPR-12FD
Lifting Capacity*	9,000 lbs. / 4082 kg	9,000 lbs. / 4082 kg	12,000 Lbs. / 5443 Kg
*Max Capacity / Front Axle	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg	6,000 lbs. / 2722 Kg
*Max Capacity / Rear Axle	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg	6,000 lbs. / 2722 Kg
A - Height Overall:	145" / 3683 mm.	145" / 3683 mm.	144" / 3403 mm.
B - Width Overall (Outside of Base Plate)	132" / 3353 mm.	145" / 3683 mm.	155" / 3937 mm.
C - Width (Outside of Columns):	124" / 3150 mm.	137" / 3480 mm.	146" / 3708 mm.
D - Cover Height:	2" / 51 mm.	2" / 51 mm.	2" / 51 mm.
E - Inside Columns:	102" / 2791 mm.	115" / 2917 mm.	118" / 2997 mm.
F - Reach (Front Arm Min.):	25" / 635 mm.	28" / 711 mm.	32" / 813 mm.
G - Reach (Front Arm Max.):	46" / 1168 mm.	55" / 1397 mm.	60" / 1524 mm.
H - Reach (Rear Arm Min.):	34" / 864 mm.	34" / 864 mm.	32" / 813 mm.
I - Reach (Rear Arm Max.):	55" / 1397 mm.	55" / 1397 mm.	60" / 1524 mm.
J - Min. Pad Height:	4" / 102 mm.	4" / 102 mm.	5" / 127 mm.
K - Rise:	69" / 1753 mm.	69" / 1753 mm.	69" / 1753 mm.
L - Max Lift Height (Pad Only):	73" / 1854 mm.	73" / 1854 mm.	74" / 1880 mm.
M - Max Lift Height (6" Adapter):	79" / 2007 mm.	79" / 2007 mm.	80" / 2032 mm.
N - Drive-Thru Clearance:	93" / 2362 mm.	106" / 2692 mm.	103" / 2616 mm.
Motor (*)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.
Time of full Rise	45 Seconds	45 Seconds	55 Seconds
Max Load Per Arm:	2,250Lbs. / 1021 Kg.	2,250Lbs. / 1021 Kg.	3,000Lbs. / 1361 Kg.

\* Special Voltages Available Upon Request.

The design, material and specifications are subject to change without notice.



BendPak Inc. is a member of the Automotive Lift Institute

## Dimensions

