


4-Post Medium Duty



HD-7PXW
 This 4-post lift will effortlessly lift up to 7,000 lbs. over 12' into the air! Perfect for stacking taller vehicles.
 Overall width: 116-3/4"
 Overall length: 224"



Optional Caster Kit Installed



Optional Jack Tray



Optional Solid Deck



Optional Drip-Tray Set



Single Hydraulic Cylinder



Oversize Cable Sheaves



Optional RJ-45 Bridge Jack



Pneumatic Safety Lock System

Features

- 9,000 lbs. lifting capacity
- Optional caster kit available
- Freestanding or bolt-down design
- Runways include rail kit for optional accessories
- Runways feature non-skid surface
- Single hydraulic cylinder mounted under runway
- Fully enclosed lifting cables, safety locks & sheaves
- Internal "anti-sway" slider blocks in each column
- Pneumatic push-button safety release
- Features heavy-duty 3/8" aircraft cable
- Longer ramps for low ground clearance vehicles
- Oversized sheave diameter reduces cable fatigue
- Rugged, self-lubricating cable sheaves
- Features 1-1/4" sheave axles
- Multi-position safety locks in each column
- Power unit located at the front or rear of the lift
- Independent "back-up" slack-cable safety latches
- Fully adjustable lock stops for precise leveling
- Drive through ramps option available
- 36" aluminium ramps option available


FOUR-POST MODELS / MEDIUM-DUTY	HD-9ST	HD-9STX	HD-9	HD-9XW
MODEL	HD-9ST	HD-9STX	HD-9	HD-9XW
Lifting Capacity	9,000 lbs. / 4082 kg	9,000 lbs. / 4082 kg	9,000 lbs. / 4082 kg	9,000 lbs. / 4082 kg
Max Capacity / Front Axle	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg
Max Capacity / Rear Axle	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg	4,500 lbs. / 2041 kg
A - Overall Width	99-3/4" / 2534 mm	99-3/4" / 2534 mm	116-3/4" / 2965 mm	116-3/4" / 2965 mm
B - Outside Length	174" / 4420 mm	198" / 5029 mm	174" / 4420 mm	198" / 5029 mm
C - Overall Length	200" / 5080 mm	224" / 5690 mm	200" / 5080 mm	224" / 5690 mm
D - Height of Columns	88" / 2235 mm	100" / 2540 mm	88" / 2235 mm	100" / 2540 mm
E - Min. Runway Height	4-1/2" / 114 mm	4-1/2" / 114 mm	4-1/2" / 114 mm	4-1/2" / 114 mm
F - Max. Rise	70" / 1778 mm	82" / 2083 mm	70" / 1778 mm	82" / 2083 mm
G - Max. Lifting Height	74-1/2" / 1892 mm	86-1/2" / 2197 mm	74-1/2" / 1892 mm	86-1/2" / 2197 mm
H - Width Between Columns	89-3/4" / 2280 mm	89-3/4" / 2280 mm	106-3/4" / 2711 mm	106-3/4" / 2711 mm
I - Runway Width	19" / 483 mm	19" / 483 mm	19" / 483 mm	19" / 483 mm
J - Width Between Runways (*)	37-1/4" / 945 mm	37-1/4" / 945 mm	945 mm - 1118 mm	945 mm - 1118 mm
K - Length of Runways	164" / 4165 mm	188" / 4775 mm	164" / 4165 mm	188" / 4775 mm
Min. Wheelbase @ Rated Capacity	115" / 2921 mm	135" / 3429 mm	115" / 2921 mm	135" / 3429 mm
Min. Wheelbase @ 75% Capacity	100" / 2540 mm	115" / 2921 mm	100" / 2540 mm	115" / 2921 mm
Min. Wheelbase @ 50% Capacity	85" / 2159 mm	95" / 2413 mm	85" / 2159 mm	95" / 2413 mm
Min. Wheelbase @ 25% Capacity	70" / 1778 mm	80" / 2032 mm	70" / 1778 mm	80" / 2032 mm
Locking Positions	12	15	12	15
Lock Spacing	Every 4" / 102 mm	Every 4" / 102 mm	Every 4" / 102 mm	Every 4" / 102 mm
Lifting Time	45 Seconds	50 Seconds	45 Seconds	50 Seconds
Standard Motor (**)	220 VAC / 60 Hz	220 VAC / 60 Hz	220 VAC / 60 Hz	220 VAC / 60 Hz

* This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.
 ** Special Voltages Available Upon Request
 The design, material and specifications are subject to change without notice.




BendPak Inc.
 is a member of the
 Automotive Lift Institute

Dimensions

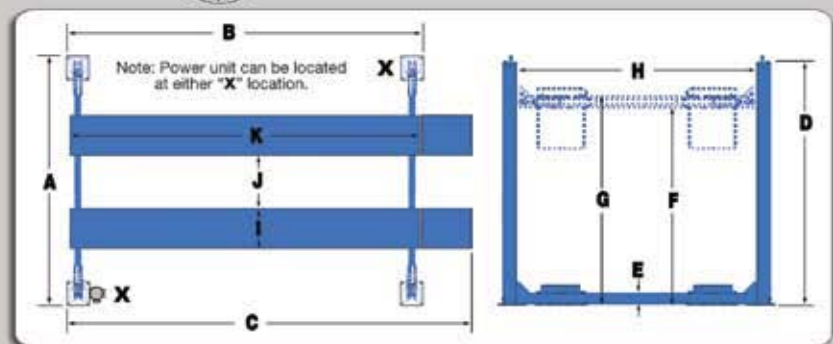

4-Post Medium Duty

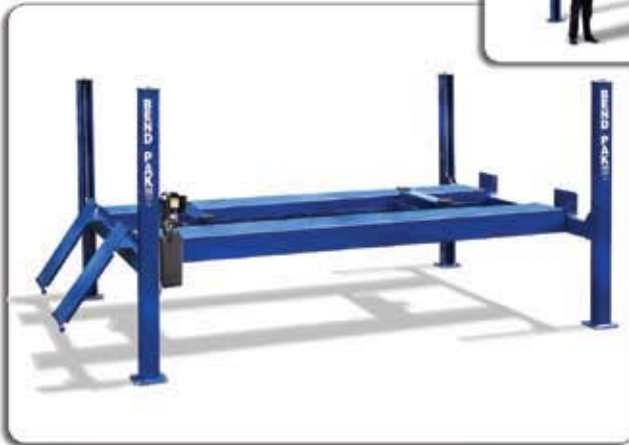

Optional Bridge Jacks



Optional Air/Electric Work Station



Electric/Hydraulic Power Unit



Single Hydraulic Cylinder



Oversize Cable Sheaves



Optional DP-30 Rolling Oil Drain



Pneumatic Safety Lock System

Features

- 12,000 lbs. lifting capacity
- Runways include rail kit for optional accessories
- Runways adjust for different tread widths
- Single hydraulic cylinder mounted under runway
- Fully enclosed lifting cables, safety locks, & sheaves
- Internal "anti-sway" slider blocks in each column
- Pneumatic push-button safety release
- Features heavy-duty 1/2" aircraft cable
- Longer ramps for low ground clearance vehicles
- Runways feature non-skid surface
- Oversized sheave diameter reduces cable fatigue
- Rugged, self-lubricating cable sheaves
- Features 1-3/8" sheave axles
- Multi-position safety locks in each column
- Power unit located at the front or rear of the lift
- Independent "back-up" slack-cable safety latches
- Fully adjustable lock stops for precise leveling
- Drive through ramps option available
- Extended 48" approach ramps option available

FOUR-POST MODELS / MEDIUM-DUTY				
MODEL	HD-148S	HD-14	HD-14TL	HD-14X
Lifting Capacity	14,000 lbs. / 6350 Kg.	14,000 lbs. / 6350 Kg.	14,000 lbs. / 6350 Kg.	14,000 lbs. / 6350 Kg.
Max Capacity / Front Axle	7,000 lbs. / 3175 Kg.	7,000 lbs. / 3175 Kg.	7,000 lbs. / 3175 Kg.	7,000 lbs. / 3175 Kg.
Max Capacity / Rear Axle	7,000 lbs. / 3175 Kg.	7,000 lbs. / 3175 Kg.	7,000 lbs. / 3175 Kg.	7,000 lbs. / 3175 Kg.
A - Overall Width	126" / 3200 mm.	126" / 3200 mm.	126" / 3200 mm.	126" / 3200 mm.
B - Outside Length	181" / 4597 mm.	205" / 5207 mm.	205" / 5207 mm.	243" / 6172 mm.
C - Overall Length	211" / 5360 mm.	235" / 5969 mm.	235" / 5969 mm.	273" / 6934 mm.
D - Height of Columns	86" / 2235 mm.	86" / 2235 mm.	100" / 2540 mm.	86" / 2235 mm.
E - Min. Runway Height	7-1/2" / 190 mm.	7-1/2" / 190 mm.	7-1/2" / 190 mm.	7-1/2" / 190 mm.
F - Max. Rise	70" / 1778 mm.	70" / 1778 mm.	82" / 2083 mm.	70" / 1778 mm.
G - Max. Lifting Height	77-1/2" / 1968 mm.	77-1/2" / 1968 mm.	89-1/2" / 2273 mm.	77-1/2" / 1968 mm.
H - Width Between Columns	118" / 2946 mm.	118" / 2946 mm.	118" / 2946 mm.	118" / 2946 mm.
I - Runway Width	20" / 508 mm.	20" / 508 mm.	20" / 508 mm.	20" / 508 mm.
J - Width Between Runways (1")	37" - 49"	37" - 49"	37" - 49"	37" - 49"
K - Length of Runways	940 mm. - 1245 mm.	940 mm. - 1245 mm.	940 mm. - 1245 mm.	940 mm. - 1245 mm.
Min. Wheelbase @ Rated Capacity	128" / 3267 mm.	140" / 3556 mm.	140" / 3556 mm.	170" / 4318 mm.
Min. Wheelbase @ 75% Capacity	105" / 2667 mm.	120" / 3048 mm.	120" / 3048 mm.	145" / 3683 mm.
Min. Wheelbase @ 50% Capacity	90" / 2286 mm.	100" / 2540 mm.	100" / 2540 mm.	120" / 3048 mm.
Min. Wheelbase @ 25% Capacity	70" / 1778 mm.	80" / 2032 mm.	80" / 2032 mm.	95" / 2413 mm.
Locking Positions	13	13	13	13
Lock Spacing	Every 4" / 102 mm.	Every 4" / 102 mm.	Every 4" / 102 mm.	Every 4" / 102 mm.
Lifting Time	60 Seconds	60 Seconds	66 Seconds	60 Seconds
Standard Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.

* This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.
 ** Special Voltages Available Upon Request
 The design, material and specifications are subject to change without notice.



BendPak Inc. is a member of the Automotive Lift Institute

Dimensions

